

Site Details

Company Name: Date:

Delivery Address:

Customer Reference/Order Number:

Contact Name: Phone:


Site Photos Provided: Completed By:

Door Requirement

(See TRU-SPRINT™ PACER Data Sheet for full specification details)

1. On the drawing below, enter the door opening measurements (height and width), as well as the headroom and sideroom measurements. Enter the backspace depth if applicable.

NB: Recommended maximum door size: 6000mmH x 6000mmW. Minimum headroom 450mm. Minimum sideroom on motor side 300mm, on non-motor side 170mm).

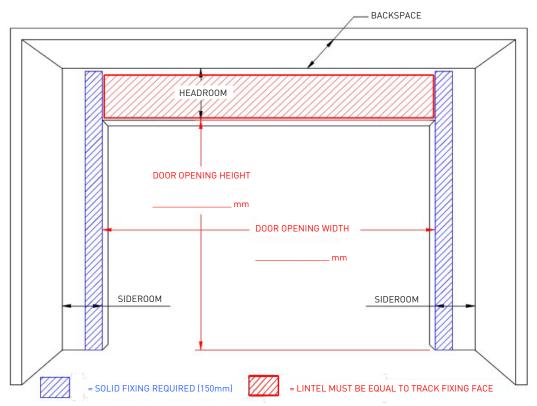

TRU-SPRINT™ Pacer Rapid Roll Door

2.	Quantity of doors requir	ed at this size and spec	fication:		
3.	Operating Environm	nent:	Temperature	re: °C	
	Wind speed:	km/h	Pressure:	Bar	
4.	Wall Construction:				
	Timber	Concrete	Steel	Polypanel	
	Thickness:		mm		
5.	Electrical:				
	Motor and Door Controlle	er: LH (Door m	ounting side)	RH	
6.	Door Curtain Option	S:			
	Safety Vision Panels,	2 Rows (window dimens	sions 450mmH x 800	00mmW)	
	No windows				
	Safety Yellow Bottom Edge				
	Curtain Colour:				
	White	Yellow	Orange	Red	
	Forest Green	Royal Blue	Grey	Black	
/ .	Door Activation Opti Radar, Qty:		remote activation as sta	standard)	
Со	mments / Sketch				
D:	roposal Acceptar				
lf y	-	proposal/order and agr		rms of trade, please complete your order number a	
	pposal Number:	and return to Metaton	.c with your signed pr	Order Number:	
	me:			Date:	

Place your order



Return this form to us to

Request a price